

# U6500 SERIES

## Polyurethane Foam Tape:

- Firm
- Low Compression Set
- Breathable Gasket
- Dimensionally Stable
- Permanent Acrylic Adhesive.




Excellent Choice for Applications Requiring:

- Low Compression Set
- Permanent Bond
- Breathable
- Thermoformable
- Dimensionally Stable

### PRES-ON'S WET COAT ADHESIVE ADVANTAGE.

Our adhesive is applied as a liquid. Promoting a superior bond to the texture of the foam. Reduces Delaminating.

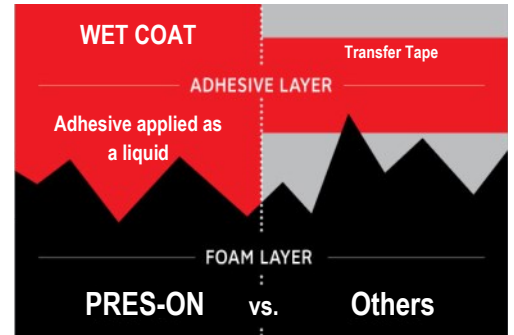

|   |                                       |
|---|---------------------------------------|
| <b>Material</b>                           | Polyurethane, Urethane                |
| <b>Cell Structure</b>                     | Open Cell                             |
| <b>Type Of Tape</b>                       | Single Sided, Plain, no adhesive      |
| <b>Adhesive</b>                           | Acrylic                               |
| <b>Thickness</b>                          | 1/32", 1/16", 1/8", 3/8"              |
| <b>Produced As</b>                        | Rolls, Spools, Sheets, Pre-Cut Shapes |
| <b>Roll Widths</b>                        | 1/4" to 54" wide                      |
| <b>Softness</b>                           | Firm                                  |
| <b>Color</b>                              | Black                                 |
| <b>Texture</b>                            | Smooth                                |
| <b>Durability</b>                         | Excellent                             |
| <b>Foam High Temperature Rating</b>       | 250 F                                 |
| <b>Foam Low Temperature Rating</b>        | -40 F                                 |
| <b>Outdoor</b>                            | Good                                  |
| <b>Adhesive Temperature Range</b>         | -20 F to 200 F                        |
| <b>Compression Deflection, ASTM D1056</b> | 30-50 psi, 25% compression            |
| <b>Durometer Shore, approximate</b>       | 70-80 OO                              |
| <b>Density, ASTM D3574</b>                | 17-23 lb/ft <sup>3</sup>              |
| <b>Tensile Strength, ASTM D3574</b>       | 240 PSI                               |
| <b>Compression Set, ASTM D1056</b>        | 3%                                    |
| <b>Elongation, ASTM D3574</b>             | 150%                                  |
| <b>Tear Strength, ASTM D624</b>           | 32 pli                                |
| <b>Flammability, FMVSS-302</b>            | Foam Passes @ .063" or thicker        |
| <b>Reach / RoHS</b>                       | Yes                                   |
| <b>Made in:</b>                           | Bolingbrook, IL USA                   |

Adhering to a higher standard™



Find the right product for your application today! Call Pres-On at 800-323-7467. visit [www.preson.com](http://www.preson.com), or email [sales@preson.com](mailto:sales@preson.com).

2600 E. 107<sup>th</sup> Street | Bolingbrook, IL 60440  
630-628-2255 | [www.preson.com](http://www.preson.com)